



Anmeldung Nr:  
Application no.: 02255483.6  
Demande no:

Anmeldetag:  
Date of filing: 06.08.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

STMicroelectronics Limited  
Planar House,  
Parkway,  
Globe Park  
Marlow,  
Buckinghamshire SL7 1YL  
GRANDE BRETAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Current Source

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G05F/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR



## CURRENT SOURCE

The present invention relates to a current source, and particularly but not exclusively to a current source adapted to generate a current proportional to absolute temperature (PTAT).

PTAT current sources are used widely as biased current generators in integrated circuits. A simple implementation of such a source is shown in Figure 1. The circuit in Figure 1 has first and second branches connected between supply Vdd and ground GND rails. The first branch comprises a resistor Re1, a first bipolar transistor Q1 with its base tied to its collector, a second bipolar transistor Q3 and a resistor R. The second branch includes a third resistor Re2, a third bipolar transistor Q2 with its base connected to the base of the bipolar transistor in the first branch, and a fourth bipolar transistor Q4 with its base connected to its collector and its base connected to its corresponding bipolar transistor in the first branch. Thus, the first and third transistors are connected in a current mirror configuration, as are the second and fourth transistors. An output transistor Q<sub>0</sub> has its base connected to the bases of the first and third transistors Q1, Q2 and its emitter connected via a resistor Re0 to the upper supply rail Vdd. The output current I<sub>out</sub> is the collector current of the output transistor Q<sub>0</sub> which is supplied to the load driven by the current source. The emitter of the second bipolar transistor in the second branch is connected to the lower supply rail GND. In that circuit, assuming that the area of the bipolar transistor Q3 is n times the area of the bipolar transistor Q4, then it can be shown that the output current I<sub>out</sub> is given by:

$$I_{out} = \frac{V_T \ln n}{R}$$

where  $V_T$  is the thermal voltage ( $KT/q$ ) and  $\ln$  is the natural log. Hence the output current I<sub>out</sub> is proportional to the thermal voltage  $V_T$ , which is proportional to absolute temperature T. One drawback of the circuit of Figure 1 is that the value of the output current I<sub>out</sub> increases with the supply voltage Vdd because of the

early effect of the bipolar transistors. This variation of the output current with supply voltage can be reduced using various cascode configurations. However, the use of a cascode configuration is that it restricts the minimum operating voltage. In particular, with existing technologies it is not possible to use a cascoded PTAT current generator down to supply voltages as low as 1.2 V.

One example of a cascaded PTAT generator is shown in Figure 2. In Figure 2, the mirror connected bipolar transistors QC1 and QC2 form a cascode for transistors Q1 and Q2. Since the transistors Q1 and QC1 both have a voltage drop of around 0.6 V, it is clear that it is now not possible for the circuit to operate at 1.2 V. In fact, the minimum voltage is around 1.6 V. In Figure 2, the output transistor  $Q_0$  is not shown.

It is an aim of the present invention to provide a current source which can operate at lower supply voltages and in which the output current has a decreased dependence on temperature.

According to one aspect of the present invention there is provided a current source adapted to produce an output current comprising: first and second circuit branches connected between first and second reference voltages, the first branch including a branch resistor connected at a junction node to a compensation resistor which is connected to the second reference voltage; and a start-up circuit connected to generate a start-up current at the junction node whereby the voltage across the compensation resistor increases with the first reference voltage and acts to reduce changes in the output current with the first reference voltage.

Preferably each circuit branch comprises series connected bipolar transistors. The first transistor in the first branch and the first transistor in the second branch are connected together in a current mirror configuration. Likewise, the second transistor in the first branch and the second transistor in the second branch are connected together in a current mirror configuration.

The circuit can comprise an output transistor whose base is connected to the bases of the first transistors, and the collector current of which provides the output current.

For a better understanding of the present invention and to show how the same may be carried into effect, reference will now be made by way of example to the accompanying drawings, in which:-

Figure 1 illustrates a simple implementation of a current source;

Figure 2 illustrates a cascoded version of the circuit of Figure 1;

Figure 3 illustrates the circuit of Figure 2 with associated start-up circuitry; and

Figure 4 illustrates a circuit in accordance with an embodiment of the invention.

Figure 3 illustrates a cascoded current source circuit with start-up circuitry. The current source circuit itself is as illustrated in Figure 2 and described above. In addition, Figure 3 illustrates start-up circuitry in the form of mirrored bipolar transistors QS1 and QS2 and a switch transistor Qs. The mirror transistor QS1 has its emitter connected to the upper supply rail Vdd, and its collector connected through a start-up resistor Rs to ground GND and also to its base. The base of the first mirror transistor QS1 is connected to the base of the second mirror transistor QS2 which has its emitter connected to the upper supply rail Vdd and its collector connected to the collector of the transistor Q2 in the second branch of the current source. The switch transistor Qs has its emitter connected to the upper supply rail Vdd, its collector connected to the tied bases of the mirror transistors QS1, QS2 and its own base connected to the collector of the transistor Q1 in the first branch. A start-up current  $I_s$  is created by the first mirror transistor QS1 and the resistor Rs. It is mirrored into the second mirror transistor QS2 and thus injected into the current source circuit at the collector of the transistor Q2. Once that circuit has started, the start-up current which was injected into the collector of the transistor Q2 is mirrored into the collector of the transistor Q1 and

thus drives the base of the switch transistor  $Q_s$  to turn off the start-up circuit. Note that the output transistor  $Q_0$  is not shown in Figure 3.

As already explained above, the current source circuit illustrated in Figure 3 cannot operate much below a supply voltage  $V_{dd}$  about 1.6 V. An alternative circuit configuration which can operate at lower supply voltages is illustrated in Figure 4. In Figure 4, like numerals designate like components as in the preceding figures. The circuit of Figure 4 differs from that of Figure 3 in that there is no cascode stage and in that there is an additional compensation resistor  $R_c$  connected between the branch resistor  $R$  and the lower supply rail GND. In addition, the start-up resistor  $R_s$  is connected between the start-up transistor  $QS1$  and a connection node 8 between the branch resistor  $R$  and the compensation resistor  $R_c$ . This has the effect that a compensation current  $I_c$  flows in the compensation resistor  $R_c$ , generating a voltage  $V_c$  across the compensation resistor  $R_c$ . This actively created voltage reduces the base-emitter voltage of the third transistor  $Q3$ . This has the effect of reducing the collector current at  $Q3$ , which affects the magnitude of the output current  $I_{out}$ . In effect, the actively created voltage across the resistor  $R_c$  serves to feed back to the voltage at the emitter of the third transistor  $Q3$ , reducing it by a value which is determinable by the value of the compensation current  $I_c$  and the value of the compensation resistor  $R_c$ .

This has the effect that the output current  $I'_{out}$  of the current source circuit of Figure 4 is given by:

$$I'_{out} = \frac{(V_T \ln n) - V_c}{R}$$

Note that the current  $I_s$  continues to flow after start-up.

This alters the relationship between the output current  $I_{out}$  and the supply voltage  $V_{dd}$ . In the circuit of Figure 3, when the supply voltage increases, the output

current  $I_{out}$  also increases. However, in the circuit of Figure 4, as the supply voltage  $V_{dd}$  increases, the current through the start-up resistor  $R_s$  will increase and so the current through the compensation resistor  $R_c$  will increase. As this happens, the voltage  $V_c$  taken across the compensation resistor  $R_c$  increases, thus reducing the emitter voltage of Q3 and thus the output current. By selecting the appropriate values for the branch resistor  $R$  and the compensation resistor  $R_c$ , the change in output current with supply voltage can be significantly reduced. It has been found that by appropriately selecting resistor values for resistors  $R_{e1}$  and  $R_{e2}$ , in conjunction with appropriately selected resistor values  $R$  and  $R_c$ , the variation in output current with supply voltage can be reduced to less than 2% with a variation in supply voltage  $V_{dd}$  between 1 V and 10 V. This compares very favourably with a 47% increase in the output current  $I_{out}$  without the described compensation technique.





## CLAIMS:

1. A current source adapted to produce an output current comprising:  
first and second circuit branches connected between first and second reference voltages, the first branch including a branch resistor connected at a junction node to a compensation resistor which is connected to the second reference voltage; and  
a start-up circuit connected to generate a start-up current at the junction node whereby the voltage across the compensation resistor increases with the first reference voltage and acts to reduce changes in the output current with the first reference voltage.
2. A current source according to claim 1, wherein the first circuit branch comprises first and second series-connected bipolar transistors, the base of the first transistor being connected to its collector.
3. A current source according to claim 2, wherein the second circuit branch comprises third and fourth series-connected bipolar transistors, the third bipolar transistor being connected as a current mirror with the first bipolar transistor and the fourth bipolar transistor being connected as a current mirror with the second bipolar transistor.
4. A current source according to claim 2 or 3, which comprises an output transistor having its base connected to the base of the first transistor, the collector current of the output transistor constituting the output current.
5. A current source according to claim 2, 3 or 4, wherein the branch resistor is connected between the junction node and the emitter of the second transistor.
6. A current source according to any preceding claim, wherein the start-up circuit comprises a pair of start-up transistors connected in a current mirror

configuration and a start-up resistor connected between the collector of one of said start-up transistors and said junction node.

7. A current source according to claim 3, wherein the area of the second transistor is larger than the area of the fourth transistor.

ABSTRACTCURRENT SOURCE

This invention relates to a current source adapted to generate a current proportional to absolute temperature which has a greatly reduced supply voltage dependence and is still able to operate at low operating voltages. This is achieved by the incorporation of a compensation resistor through which the start-up current is passed.



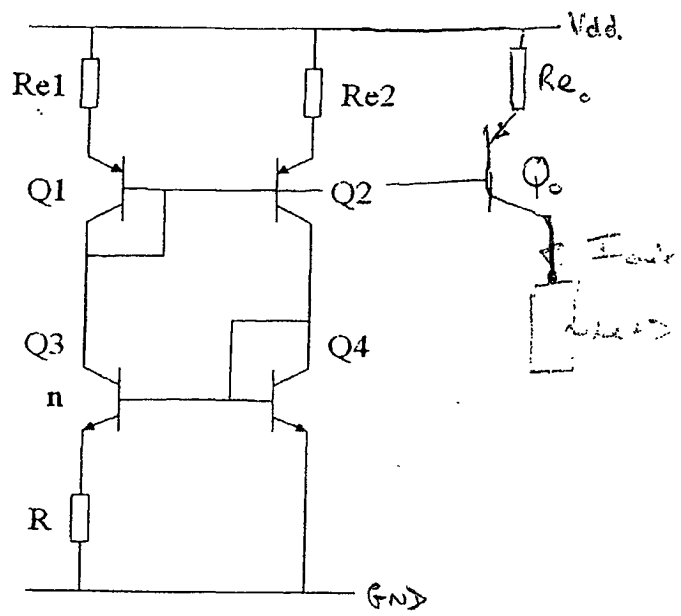


Figure 1

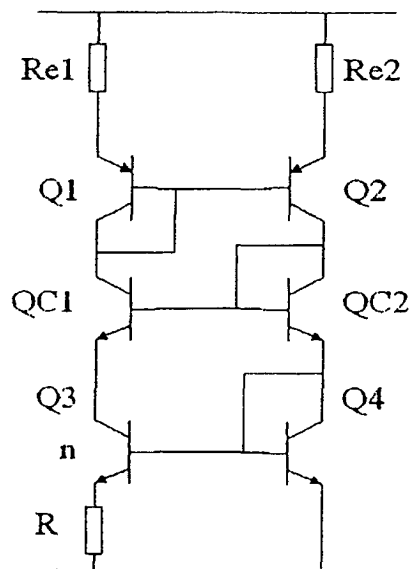


Figure 2

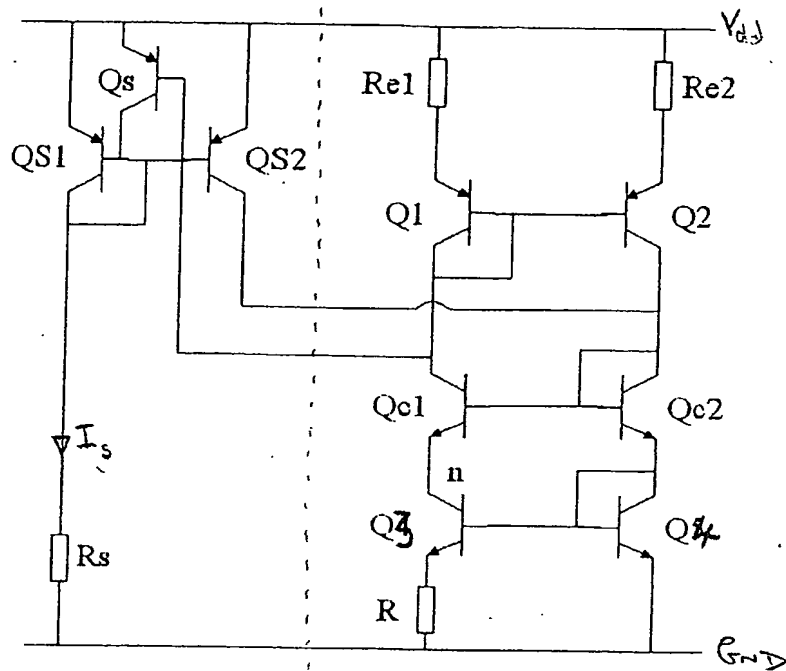


Figure 3

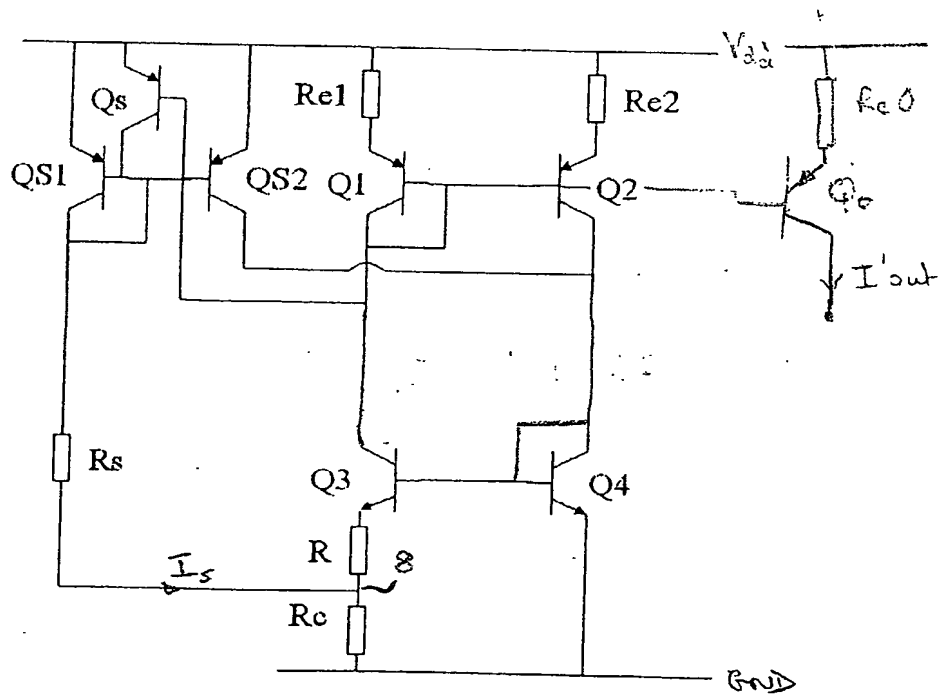


Figure 4